



Szekunder kivezetések az áramváltó tetején. Alkalmazható vízszintes áramsín mérete: max. 80x50, 100x50 és 125x50 mm

Ip	Cl. 0,5	Cl. 1	Cl. 3	Szekunder áram	Szekunder Áram	Súly
A	VA	VA	VA	5A	1A	Kg
1000	7	10	15	TCSN12E 1000A	TCSN12 1E 1000A	1,5
1200	7	10	15	TCSN12E 1200A	TCSN12 1E 1200A	1,5
1500	7	10	15	TCSN12E 1500A	TCSN12 1E 1500A	1,5
2000	10	13	16	TCSN12E 2000A	TCSN12 1E 2000A	1,5
2500	10	13	16	TCSN12E 2500A	TCSN12 1E 2500A	1,5
3000	10	13	16	TCSN12E 3000A	TCSN12 1E 3000A	1,5
4000	20	25	30	TCSN12E 4000A	TCSN12 1E 4000A	2,0
5000	30	40	50	TCSN12E 5000A	TCSN12 1E 5000A	2,0

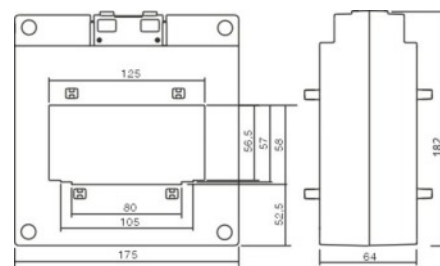

8 db. M6x50 ABS műanyag csavar



Védő kivitelű csoport, TCSN12E/P

Primer áram	Class 5P5				Class 5P10				Súly
	Szekunder áram ls		Szekunder áram ls		Szekunder áram ls		Szekunder áram ls		
	A	VA	1A	VA	5A	VA	1A	VA	
2000	TCSN12/P 2k0A 5P5	22	TCSN12/P 1 2k0A 5P5	22	TCSN12/P 2k0A 5P10	17	TCSN12/P 1 2k0A 5P10	17	0,5
2500	TCSN12/P 2k5A 5P5	25	TCSN12/P 1 2k5A 5P5	25	TCSN12/P 2k5A 5P10	20	TCSN12/P 1 2k5A 5P10	20	0,5
3000	TCSN12/P 3k0A 5P5	30	TCSN12/P 1 3k0A 5P5	30	TCSN12/P 3k0A 5P10	25	TCSN12/P 1 3k0A 5P10	25	0,5
4000	TCSN12/P 4k0A 5P5	35	TCSN12/P 1 4k0A 5P5	35	TCSN12/P 4k0A 5P10	30	TCSN12/P 1 4k0A 5P10	30	0,5

Primer áram	Class 5P15				Class 5P20				Súly
	Szekunder áram ls		Szekunder áram ls		Szekunder áram ls		Szekunder áram ls		
	A	VA	1A	VA	5A	VA	1A	VA	
2000	TCSN12/P 2k0A 5P15	8	TCSN12/P 1 2k0A 5P15	8	TCSN12/P 2k0A 5P20	5	TCSN12/P 1 2k0A 5P20	5	0,5
2500	TCSN12/P 2k5A 5P15	10	TCSN12/P 1 2k5A 5P15	10	TCSN12/P 2k5A 5P20	6	TCSN12/P 1 2k5A 5P20	6	0,5
3000	TCSN12/P 3k0A 5P15	12	TCSN12/P 1 3k0A 5P15	12	TCSN12/P 3k0A 5P20	7	TCSN12/P 1 3k0A 5P20	7	0,5
4000	TCSN12/P 4k0A 5P15	15	TCSN12/P 1 4k0A 5P15	15	TCSN12/P 4k0A 5P20	8	TCSN12/P 1 4k0A 5P20	8	0,5